



Wide Performance Ionizing Blower

AEROSTAT® FPD

The Aerostat FPD series of products has been designed to control electrostatic charges in flat panel assembly and electronics manufacturing applications requiring stable operation with exceptionally fast discharge time performance. The FPD ionizing blowers are built for reliability and simplicity.

Aerostat FPD utilizes reliable, low maintenance AC corona technology with high flow rate fans to provide fast static discharge performance. The inherent stability of the Aerostat FPD reduces maintenance frequency and a built-in emitter cleaner reduces maintenance time. Our unique geometry and airflow control provides consistent performance, meeting the demands of product assembly operations.


The Aerostat FPD's self-monitoring feature assures the user of controlled, consistent ion output. A light indicates both that power is applied to the unit and that ions are being produced. Performance is enhanced by the use of Simco-Ion's industry-leading and highly reliable AC technology.

Features

- High output, high-velocity fans
- Inherently balanced ionization
- Ionization indicator light
- Built-in emitter point cleaner
- Optional fan air filter

Benefits

- Extremely fast static charge neutralization over a wide horizontal or vertical application area
- Offers consistent performance with low maintenance frequency
- Visual indication that the target product is being neutralized
- Continued blower operation will require little maintenance
- Protection for internal components from environmental contamination

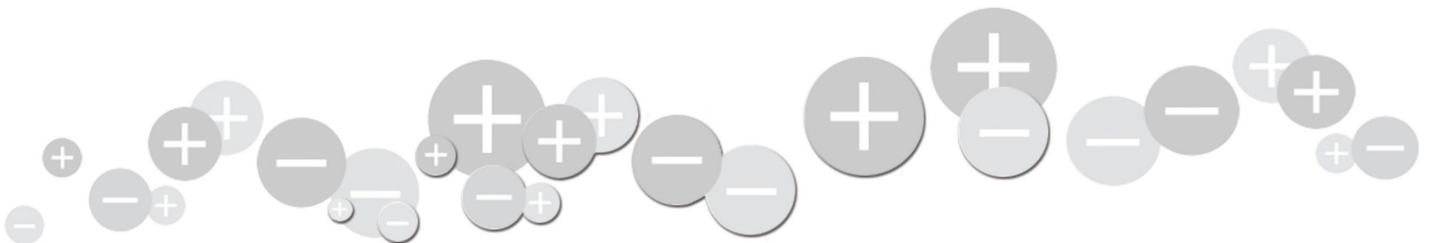

Aerostat FPD							
Input Voltage	120 VAC, 60 Hz: 0.3A (2-fan); 0.4A (3-fan); 0.5A (4-fan) 230 VAC, 50 Hz: 0.2A (2-fan); 0.2A (3-fan); 0.3A (4-fan)						
Discharge ¹	1.0 sec @ 12" (30.5 cm); 1000-100V fan high						
Balance	0 ±10V						
Ion Emission	AC Technology						
Emitter	Stainless Steel						
Cleanroom Class	ISO 14644-1 Class 5						
LED Indicator	Ionization ON						
Control	Recessed fan speed and ON/OFF switch						
Air Supply	Volume (cfm, m³/min)		Low Fan Speed		High Fan Speed		
		2-fan	150 (4.3)		300 (8.5)		
		3-fan	230 (6.4)		450 (12.8)		
		4-fan	300 (8.5)		600 (17.0)		
	Speed ² (fpm, m/s)		1' (0.3m)	2' (0.6m)	3' (0.9m)	4' (1.2m)	5' (1.5m)
		Low Fan Speed	500 (2.5)	350 (1.8)	250 (1.3)	200 (1.0)	150 (1.8)
High Fan Speed		1000 (5.0)	700 (3.5)	500 (2.5)	400 (2.0)	300 (1.5)	
Filter	30 ppi open cell polyurethane foam (optional)						
Audible Noise	59-69 dBA (max), measured @ 24" (61.0 cm) from blower						
Ozone	Equilibrium concentration <0.02 ppm						
Operating Env	50-90°F (10-32°C); 30-70% RH, non-condensing						
Mounting	Stainless steel bracket						
Enclosure	Powder-coated white enamel Aluminum						
Dimension	2-fan: 23.25"L x 4.0"H x 6.25"D (59.1 x 10.2 x 15.9 cm)						
	3-fan: 35.5"L x 4.0"H x 6.25"D (90.2 x 10.2 x 15.9 cm)						
	4-fan: 47.75"L x 4.0"H x 6.25"D (121.3 x 10.2 x 15.9 cm)						
Weight	2-fan: 10 lb (4.54 kg); 3-fan: 13 lb (5.90 kg); 4-fan: 16 lb (7.26 kg)						
Warranty	Two year limited warranty						
Certification							

1. Tested in accordance with ANSI /ESD STM3.1-2015.

2. Air velocity in FPM measured at the center of the air stream.


Ordering Information

4011005	Aerostat FPD 2-fan Ionizer, 120/230V, 50/60 Hz, North America
4011279	Aerostat FPD 2-fan Ionizer, 120/230V, 50/60 Hz, Continental Europe
4011280	Aerostat FPD 2-fan Ionizer, 120/230V, 50/60 Hz, United Kingdom
4016010	Aerostat FPD 2-fan Ionizer, 120/230V, 50/60 Hz, China
4011007	Aerostat FPD 3-fan Ionizer, 120/230V, 50/60 Hz, North America
4011281	Aerostat FPD 3-fan Ionizer, 120/230V, 50/60 Hz, Continental Europe
4011282	Aerostat FPD 3-fan Ionizer, 120/230V, 50/60 Hz, United Kingdom
4016011	Aerostat FPD 3-fan Ionizer, 120/230V, 50/60 Hz, China
4011009	Aerostat FPD 4-fan Ionizer, 120/230V, 50/60 Hz, North America
4011283	Aerostat FPD 4-fan Ionizer, 120/230V, 50/60 Hz, Continental Europe
4011284	Aerostat FPD 4-fan Ionizer, 120/230V, 50/60 Hz, United Kingdom
4016012	Aerostat FPD 4-fan Ionizer, 120/230V, 50/60 Hz, China
4710017	Aerostat Air Filter Retainer (one per fan required)
4100810	Aerostat Air Filter (6 pack)

FPD Coverage Areas


The Aerostat FPD ionization blower comes in either 2-fan, 3-fan, or 4-fan chassis lengths. Each length is designed for optimal coverage area and a variety of applications:

Blower	Overhead Applications	Benchtop Applications
2-fan	2'W x 2'L (0.6m x 0.6m)	2'W x 5'L (0.6m x 1.5m)
3-fan	2'W x 3'L (0.6m x 0.9m)	3'W x 5'L (0.9m x 1.5m)
4-fan	2'W x 4'L (0.6m x 1.2m)	4'W x 5'L (1.2m x 1.5m)

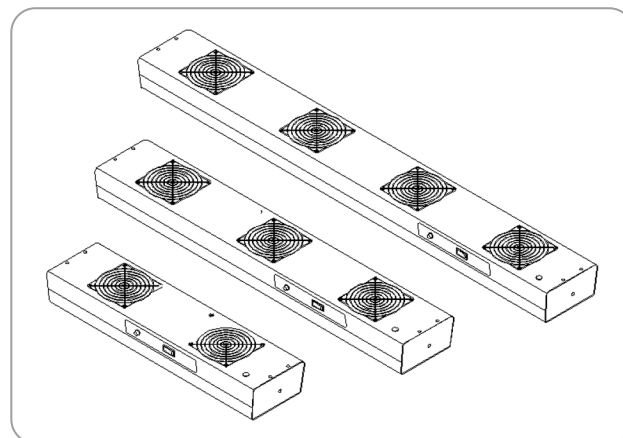

Discharge Times (typical)

Discharge time across face of overhead blower and fan speed is set to "HIGH".

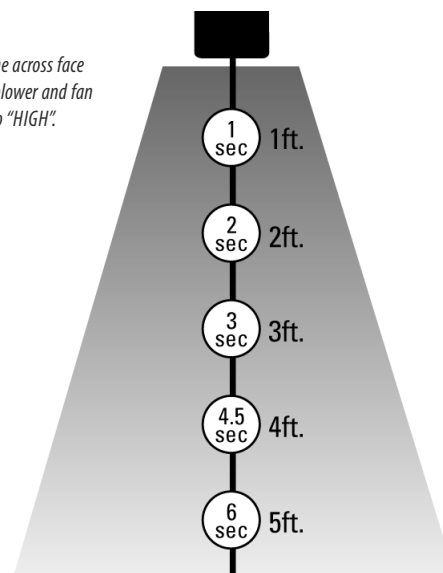

SIMCO ION™
An ITW Company

DS-AeroStat FPD_V7 - 5/25
© 2025 Simco-Ion
All rights reserved.

Simco-Ion, Technology Group

1141 Harbor Bay Parkway, Suite 201
Alameda, CA 94502

Tel: +1 (800) 367-2452 (in USA)
Tel: +1 (510) 217-0460

ioninfo@simco-ion.com
www.simco-ion.com/technology

w o r l d w i d e l e a d e r s i n s t a t i c c o n t r o l